

# WPN20RC

## 20 Watt Regulated DC/DC Converter

ISO9001  
CERTIFIED



For full details go to  
[www.cd4power.com/rohs](http://www.cd4power.com/rohs)



- Operating Temperature Range: -40°C to +115°C
- Industry Standard Pinout
- Input and Output Filtering
- Low Profile Shell
- Single and Dual Outputs
- High Efficiency
- Remote On/Off Function
- Output Trim Function
- Zero Load Operation
- EN 60950, UL1950, C-UL, VDE Agency Approvals
- RoHS Compliant



The WPN20RC series is a family of high performance DC/DC converters available in three input voltage ranges of 9-18V, 18-36V and 33-75V. The unit is housed in a space saving aluminum shell and combines low cost with high performance across all line and load conditions. The 300kHz switching frequency and forward converter topology provide excellent performance across all line and load conditions in a space saving

package. Other features include: full regulation down to zero load, under voltage lock-out, internal temperature shutdown, soft start, remote on/off and over current protection.

An output trim feature is provided, allowing the user to compensate for long line lengths. The WPN20RC Series is assembled using a fully automated process

incorporating 100% surface mounted components for increased reliability.

Applications include: Telecommunications, Battery Powered Systems, Process Control Equipment, Transportation Equipment and Distributed Power Systems.

### PRODUCT SELECTION CHART

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage, rated output current unless otherwise specified.

MODEL*	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (A)		INPUT CURRENT NOM LOAD	EFFICIENCY (%)
			MIN LOAD	NOM LOAD		
WPN20R12S03C	12	3.3	0.0	6.00	2.00	82
WPN20R12S05C	12	5.0	0.0	4.00	2.00	84
WPN20R12S12C	12	12.0	0.0	1.66	2.00	86
WPN20R12S15C	12	15.0	0.0	1.33	2.00	86
WPN20R12D05C	12	±5.0	0.0	±2.00	2.00	84
WPN20R12D12C	12	±12.0	0.0	±0.83	2.00	86
WPN20R12D15C	12	±15.0	0.0	±0.67	2.00	86
WPN20R24S03C	24	3.3	0.0	6.00	1.00	83
WPN20R24S05C	24	5.0	0.0	4.00	1.00	84
WPN20R24S12C	24	12.0	0.0	1.66	1.00	87
WPN20R24S15C	24	15.0	0.0	1.33	1.00	87
WPN20R24D05C	24	±5.0	0.0	±2.00	1.00	85
WPN20R24D12C	24	±12.0	0.0	±0.83	1.00	87
WPN20R24D15C	24	±15.0	0.0	±0.67	1.00	87
WPN20R48S03C	48	3.3	0.0	6.00	0.50	83
WPN20R48S05C	48	5.0	0.0	4.00	0.50	85
WPN20R48S12C	48	12.0	0.0	1.66	0.50	88
WPN20R48S15C	48	15.0	0.0	1.33	0.50	86
WPN20R48D05C	48	±5.0	0.0	±2.00	0.50	85
WPN20R48D12C	48	±12.0	0.0	±0.83	0.50	87
WPN20R48D15C	48	±15.0	0.0	±0.67	0.50	87

NOTE: Other input to output voltages may be available. Please consult factory.

# SPECIFICATIONS, ALL MODELS

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage, rated output current unless otherwise specified.

	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>OUTPUT</b>	<b>INPUT</b>					
	Voltage Range		9	12	18	$V_{DC}$
			18	24	36	$V_{DC}$
			33	48	75	$V_{DC}$
	Reflected Ripple Current	All Input Ranges			50	mApk-pk
	<b>INPUT CONTROL</b>					
	Temperature Shutdown	Case	105		115	$^\circ\text{C}$
	Temperature Hysteresis			10		$^\circ\text{C}$
	Quiescent Standby Current	Current Into + $V_{IN}$		8	10	mA
	Undervoltage Control	See Attached Plots				
<b>GENERAL</b>	<b>OUTPUT</b>					
	<b>ISOLATION</b>					
	Rated Voltage		1500			$V_{DC}$
	Test Voltage	60Hz, 10 Seconds	1500			$V_{DC}$
	Resistance			10		$G\Omega$
	Capacitance			400		pF
	Leakage Current			30		mArms
	Rated Power				20	W
	Voltage Setpoint Accuracy				$\pm 1.5$	%
	Temperature Coefficient				$\pm 0.005$	$\%/^\circ\text{C}$
	<b>REGULATION</b>					
	Line Regulation					
	Singles	High Line to Low Line			$\pm 0.1$	%
	Duals	High Line to Low Line			$\pm 0.5$	%
	Load Regulation					
	Singles	Mn Load to Nom. Load			$\pm 0.5$	%
	Duals	Mn Load to Nom. Load			$\pm 2.0$	%
	<b>RIPPLE &amp; NOISE</b>					
	Single Outputs	BW = 5Hz to 20MHz		60	100	mVp-p
	Dual Outputs	BW = 5Hz to 20MHz		50	100	mVp-p
	Output Adjust Range	See Attached Plots				
	Short Circuit and Overcurrent Protection	Continuous				
	Max Capacitive Load			550		$\mu\text{F/A}$
	<b>GENERAL</b>					
	Switching Frequency			300		kHz
	MTTF per ML-HDBK-217	Circuit Stress Method				
	Ground Benign	$T_a = +25^\circ$ Unmodified Database		1,400,000		Hr
	Package Weight			32		g
Moisture Sensitivity Level (MSL)	as per IPC/JEDEC J-STD-20		2			
<b>TEMPERATURE</b>						
Specification	Case	-40		+ 85	$^\circ\text{C}$	
Operation	Case	-40		+ 85	$^\circ\text{C}$	
Storage		-55		+125	$^\circ\text{C}$	

## REMOTE ON/OFF CONTROL

Logic Compatibility ..... Open Collector TTL  
 EC On ..... Open Circuit  
 EC Off ..... < 0.7V  
 Shutdown Idle Current ..... 8mA

## ORDERING INFORMATION

**WPN20R XXYZZ C**


Device Family \_\_\_\_\_  
 20W Regulated DC/DC Unit

Model Number \_\_\_\_\_  
 xx = Input Range, e.g. 48V  
 y = Number of Outputs (S=single; D=dual)  
 zz = Output Voltage, e.g. '05' for 5V



RoHS Compliant \_\_\_\_\_

# MECHANICAL

## PIN SIDE DOWN

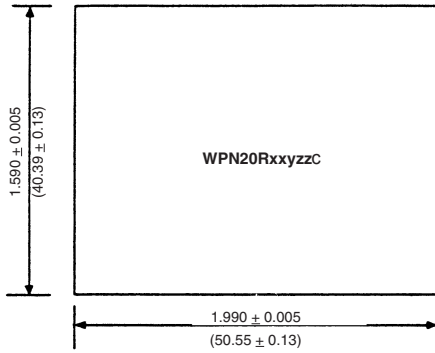

## SIDE VIEW

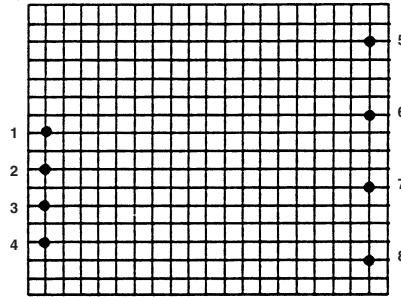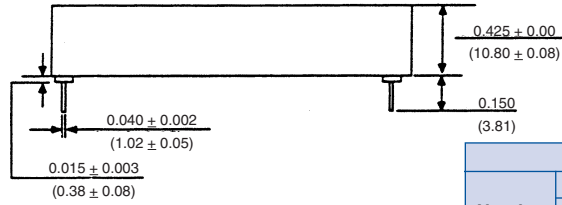

## PIN SIDE UP


### PIN CONNECTIONS

Number	Pin Function	
	Singles	Duals
1	+VIN	+VIN
2	-VIN	-VIN
3	NO PIN	NO PIN
4	Remote On/Off	Remote On/Off
5	NO PIN	+VOUT
6	+VOUT	COMMON
7	-VOUT	-VOUT
8	TRIM	TRIM


### NOTES:

All dimensions are in inches (millimeters).  
 GRID: 0.100 inches (2.54 millimeters)  
 Pin Placement: Tolerance: ±0.015  
 Marked with: specific model ordered, date code, job code.  
 MATERIAL: Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is phosphor bronze; lead finish is matte Sn (100-300 micro-inches) over Ni (5-40 microinches).


## SIMPLIFIED CIRCUIT DIAGRAM

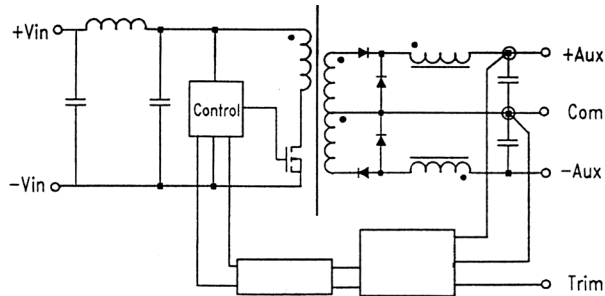

## THERMAL DERATING CURVE

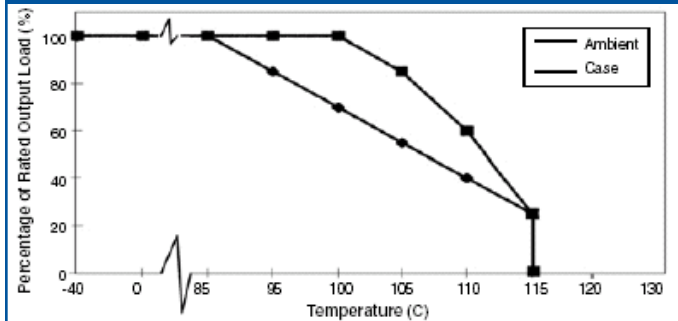

## HYSTERESIS GRAPH







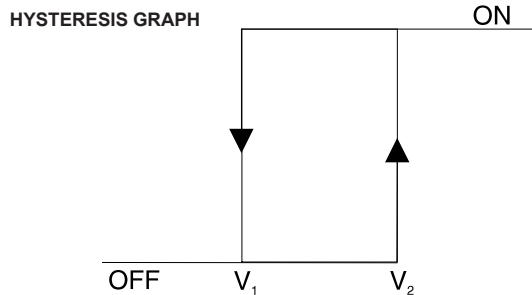


### Undervoltage Lockout Threshold Voltages

Nominal Input Voltage Range	Shutdown Low Voltage (V1) OFF	Shutdown High Voltage (V2) ON
12	7	8.8
24	15.5	17
48	30	33

Specifications typical at TA=25°C, rated output current.

# PERFORMANCE GRAPHS

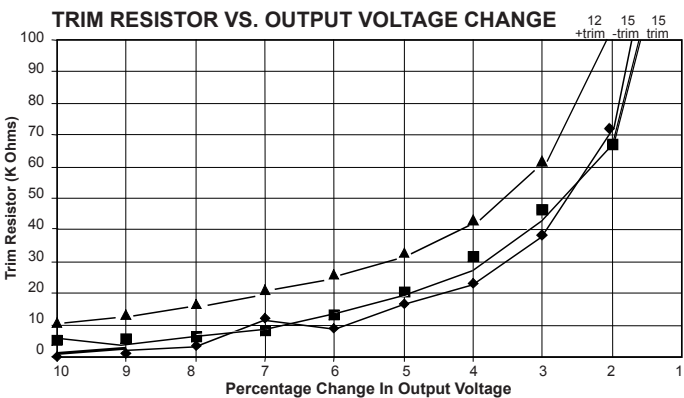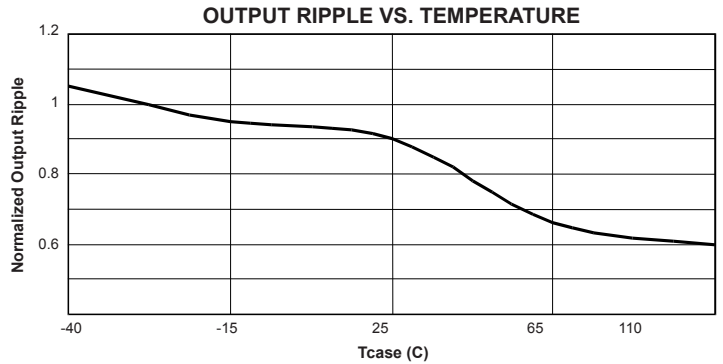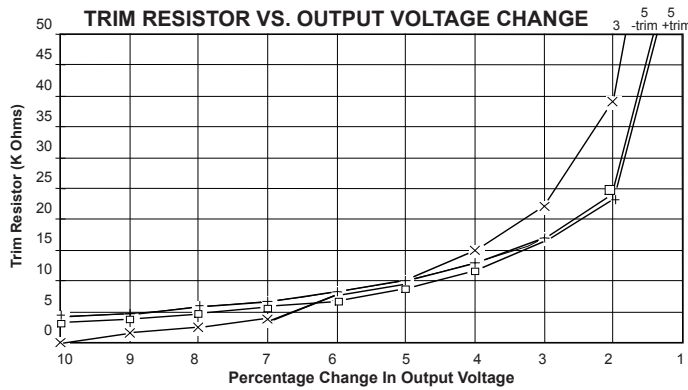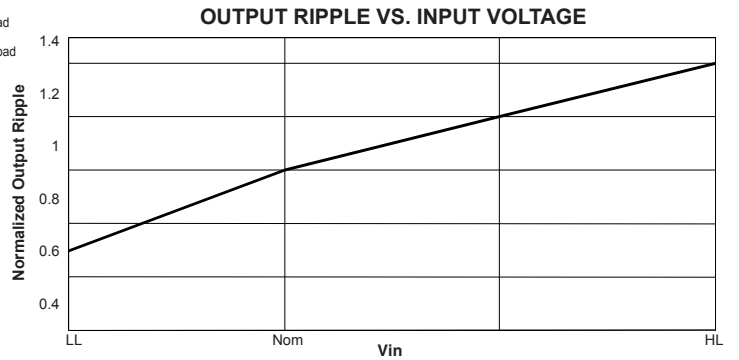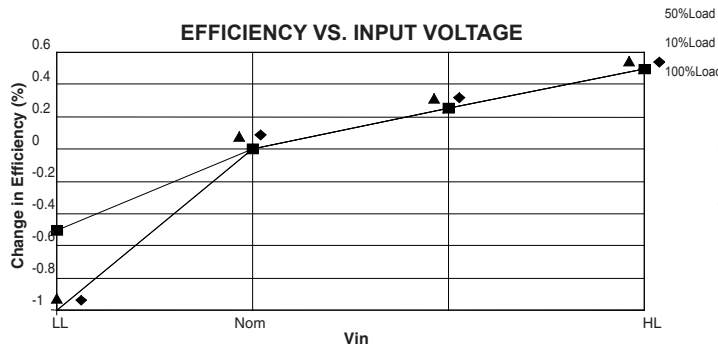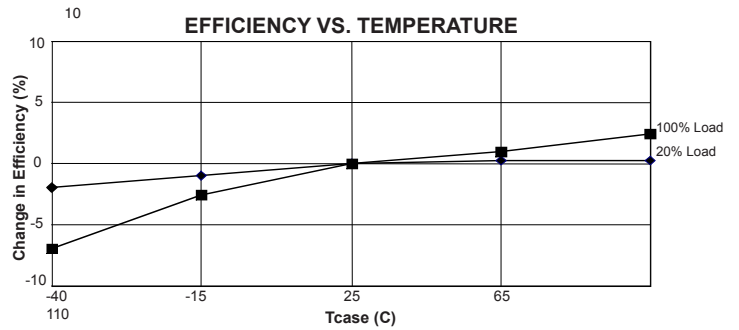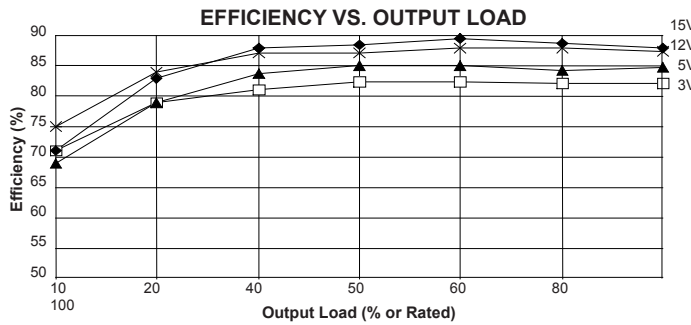

## THROUGH-HOLE SOLDERING INFORMATION

These devices are intended for wave soldering or manual soldering. **They are not intended to be subject to surface mount processes under any circumstances.**

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.



C&D Technologies, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

[www.cd4power.com](http://www.cd4power.com) email: [sales@cdtechno.com](mailto:sales@cdtechno.com)

ISO 9001 REGISTERED

© 2007 C&D Technologies, Inc.

C&D Technologies, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

**USA:** Tucson (Az), Tel: (800) 547 2537, email: [sales@cdtechno.com](mailto:sales@cdtechno.com)  
**Canada:** Toronto, Tel: (866) 740 1232, email: [toronto@cdtechno.com](mailto:toronto@cdtechno.com)  
**UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: [mk@cdtechno.com](mailto:mk@cdtechno.com)  
**France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: [france@cdtechno.com](mailto:france@cdtechno.com)  
**Germany:** München, Tel: +49 (0)89-544334-0, email: [ped.munich@cdtechno.com](mailto:ped.munich@cdtechno.com)  
**Japan:** Tokyo, Tel: 3-3779-1031, email: [sales\\_tokyo@cdtechno.com](mailto:sales_tokyo@cdtechno.com)  
Osaka, Tel: 6-6354-2025, email: [sales\\_osaka@cdtechno.com](mailto:sales_osaka@cdtechno.com)  
**Website:** [www.cd4power.jp](http://www.cd4power.jp)  
**China:** Shanghai, Tel: +86 215 027 3678, email: [shanghai@cdtechno.com](mailto:shanghai@cdtechno.com)  
Guangzhou, Tel: +86 208 221 8066, email: [guangzhou@cdtechno.com](mailto:guangzhou@cdtechno.com)