


矩形

DC

2-wire

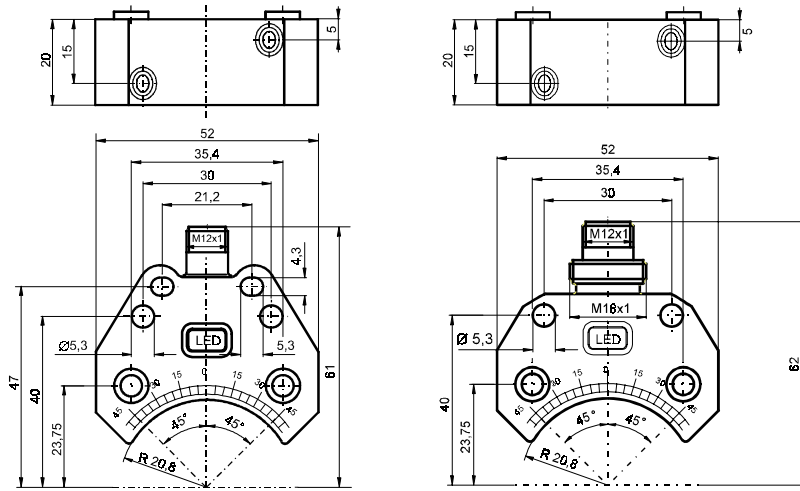

额定动作距离 s_n , 安装	3 mm,		3 mm,	
DC	常开	NBN3-F25-Z8-V1	NBN3-F25F-Z8-V1	
	常开/常闭			
可靠动作距离范围 s_a [mm]	0 ...2,43		0 ...2,43	
衰减系数 r	r_{ST37}	1,2	1,2	
	r_{V2A}	1	1	
	r_{AI}	0,5	0,5	
工作电压 U_B [V]	6 ...60		6 ...60	
工作电流 I_L [mA]	4...100		4...100	
开关频率 [Hz]	500		500	
漏电流 I_R [mA]	1		1	
电压降 [V]	5		5	
短路保护	no		no	
极性保护	脉冲		容许	
输出显示	LED, 黄		LED, 黄	
阀状态显示	-		-	
工作温度 [°C]	-25 ...70		-25 ...70	
EMC to	EN 60947-5-2		-	
In compliance with	EN60947-5-2		EN60947-5-2	
Protection to IEC 60529	IP 67		IP 67	
System connection (S)	V1-连接器		V1-连接器	
导线横截面	-		-	
Valve connection (V)	-		-	
Wire cross section s_{Valve}	-		-	
外壳材料	PBT		PBT	

电气连接

Z8

