



FEATURES

- RoHS compliant
- High efficiency to 87%
- Power density up to 1.5Wcm³
- UL 94V-0 package material
- Industry standard pinout
- Surge rating to 12W
- Non latching current limit
- 1.5kV input to output isolation
- Versatile control options
- Continuous rating to 10W at 72°C without heatsink
- Operation to zero load
- Protected against load faults
- Internal over temperature protection
- Uses no electrolytic capacitors
- Fixed frequency
- No external components required

DESCRIPTION

The NPH10S series of DC/DC converters combines ease of application with versatility. The pin pattern is based on the popular industry standard, but two additional pins may optionally be fitted to provide a variety of features not commonly found on units of this type. High efficiency enables full rating to be achieved in a small package without heat-sinking. Thermally protected against sustained overload. The copper case achieves efficient heat transfer and screening. The product range has been recognised by Underwriters Laboratory (UL) to UL 1950 for operational insulation, file number E179522 applies.

SELECTION GUIDE

Order Code ¹	Nominal Input Voltage	Output Voltage	Output Current	Current Limit ² (TYP.)	Efficiency	MAX. Load Capacitance	MTTF ³
	V	V	A	A	%	µF	kHrs
NPH10S2403EiC	24	3.4	2.94	4.3	79	470	279
NPH10S2403iC	24	3.4	2.94	4.3	79	470	279
NPH10S2405EiC	24	5.1	1.96	3.1	83	470	275
NPH10S2405iC	24	5.1	1.96	3.1	83	470	275
NPH10S2412EiC	24	12.1	0.83	1.2	86	100	259
NPH10S2412iC	24	12.1	0.83	1.2	86	100	259
NPH10S2415EiC	24	15.1	0.67	1.1	86	47	243
NPH10S2415iC	24	15.1	0.67	1.1	86	47	243
NPH10S4803EiC	48	3.4	2.94	4.1	80	470	317
NPH10S4803iC	48	3.4	2.94	4.1	80	470	317
NPH10S4805EiC	48	5.1	1.96	2.8	83	470	312
NPH10S4805iC	48	5.1	1.96	2.8	83	470	312
NPH10S4812EiC	48	12.1	0.83	1.3	86	56	291
NPH10S4812iC	48	12.1	0.83	1.3	86	56	291
NPH10S4815EiC	48	15.1	0.67	1.0	87	22	272
NPH10S4815iC	48	15.1	0.67	1.0	87	22	272

INPUT CHARACTERISTICS

Parameter	Conditions	MIN.	TYP.	MAX.	Units
Voltage range	Continuous operation, 24V input types	18	24	36	V
	Continuous operation, 48V input types ⁴	36	48	75	

OUTPUT CHARACTERISTICS

Parameter	Conditions	MIN.	TYP.	MAX.	Units
Voltage set point error	50% load after 30 mins at nominal supply voltage			0.5	%
Overall voltage error	Case temperature -40°C to 110°C Load 0% - 100% Input specified range		1	2.5	%
Temperature coefficient of output voltage (slope)	Over any 10°C span within the specified temperature range		50	250	ppm°C
Deviation of output voltage	Specified over temperature MIN-MAX		0.5	1	%
Line regulation	Operating voltage range, 50% load		0.05	0.1	%
Load Regulation	0% - 100% rated load ⁵			0.5	%
Ripple	rms		70		mV

ABSOLUTE MAXIMUM RATINGS

Input voltage, 24V input types	-0.5V to 40V ⁶
Input voltage, 48V input types	-0.5V to 80V ⁶
Output voltage	-0.3V to controlled output voltage (operating or non-operating)
Output trim control	-1V to +30V
Synchronisation/shutdown control	±15V relative to input return

1. Parts ending with EiC have optional TRIM and SS pins fitted.
2. Current is quoted when output is 95% of regulated voltage.
3. Calculated using MIL-HDBK-217F with nominal input voltage at full load.
4. For applications requiring UL1950 recognition, input voltage must not exceed 60VDC.
5. A minimum load of 10% of rating is recommended for typical applications; see application notes.
6. Absolute maximum value for 30 seconds. Prolonged application may damage the product.
All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.




For full details go to
www.cd4power.com/rohs

CONTROL CHARACTERISTICS					
Parameter	Conditions	MIN.	TYP.	MAX.	Units
Voltage trimming range ¹	At rated load, trim control at either output	±10			%
Remote switch input (voltage relative to input negative) ¹	For shutdown	-15	0	1.5	V
	Operating, open circuit voltage	9	10	11	
Start delay	Time from application of valid input voltage to output being in specification		25		ms
Synchronisation ¹	Specified drive signal	320		440	kHz
Switching frequency		330	350	395	kHz

ISOLATION CHARACTERISTICS					
Parameter	Conditions	MIN.	TYP.	MAX.	Units
Isolation test voltage	Flash tested for 1 second	1500			VDC
Resistance	VISO = 500VDC	1			GΩ
Capacitance	3.3V and 5V output		50		pF
	12V and 15V output		90		

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	MIN.	TYP.	MAX.	Units
Case temperature	Full load	-40		110	°C
Storage	Absolute MAX. internal temperature	-40		125	
Relative humidity	Non condensing 85°C			85	%
Thermal protection	Operates at case temperature	110			°C

THERMAL CHARACTERISTICS				
MAX. power rating with case temperature maintained by external means (e.g. forced air cooling).				
Part Number	Case Temperature			Units
	100°C	105°C	110°C	
NPH20S2403XXX	10	7.0	2.3	W
NPH10S2405XXX	10	8.2	3.0	
NPH10S2412XXX	10	9.5	4.0	
NPH10S2415XXX	12	9.5	4.0	
NPH10S4803XXX	10	7.0	1.0	W
NPH10S4805XXX	10	4.7	1.0	
NPH10S4812XXX	12	8.0	0	
NPH10S4815XXX	12	7.5	0	

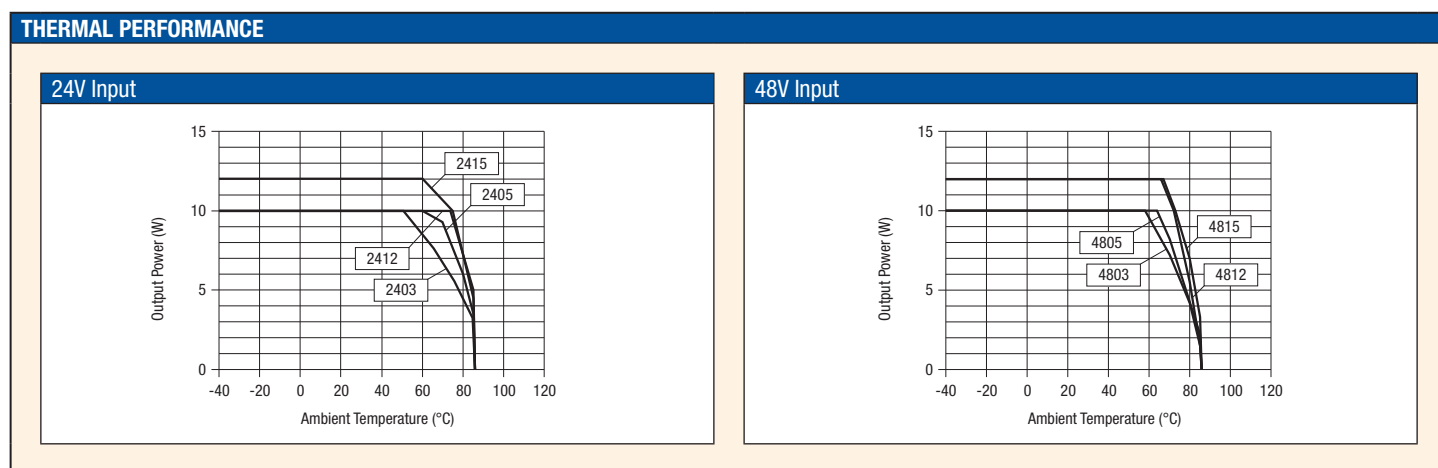

1. Optional - where fitted.

APPLICATION NOTES

OUTPUT VOLTAGE ADJUSTMENT


The trim resistor equations are:

$$R_{up} = (R/V_{up}) - S \text{ k}\Omega$$


$$R_{down} = (L \times \frac{T}{V_{down}}) - T - S \text{ k}\Omega$$

V _{NOM}	3.4	5.1	12.1	15.1
S	22.2973	20.59761	28.79096	39.95902
T	10.1351	9.36255	15.42373	20.77869
R	17.9994	24.49487	94.9661	147.7314
L	-1.6241	-2.48374	-5.942857	-7.990244

TRIM UP

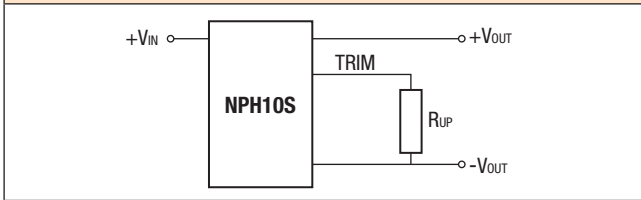

TRIM DOWN

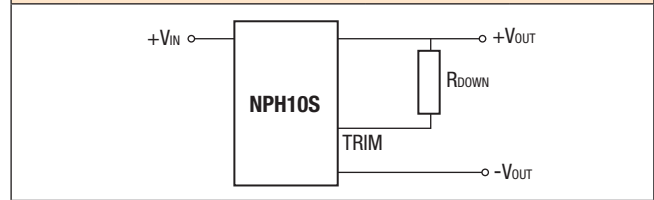

When the output voltage is trimmed up, output current must be derated so that the maximum output power 10W is not exceeded.

Example to decrease output voltage of NPH10S4805EiC by 0.1V: $R_{DOWN} = \left(\frac{-2.48374 \times 9.36255}{-0.1} \right) - 9.36255 - 20.59761 = 203.18 \text{ k}\Omega$

SET VOLTAGE

The output voltage of all units is set to 100mV above nominal, to offset resistive losses and thus assist with worst case error calculations. For the EiC versions, this allowance can be altered with a single fixed resistor, connected from the trimming pin to one of the output pins.

SHUTDOWN

When the shutdown pin is shorted to the negative input, the converter will stop. Its current consumption will then be less than 1mA at nominal supply voltage. The voltage must be less than 1.5V to ensure that the unit stops, and must be able to sink at least 1mA.

The unit will restart if the control pin is left open circuit or raised to a value close to its normal open circuit voltage. This is typically 10V. Note however, that the unit will not meet specification while a significant current drain from this pin remains.

If the shutdown pin is to be connected to a long wire, it is recommended that a capacitor decouples the pin to the supply common in order to avoid the risk of injecting noise into the converter circuit. A series resistor may also be helpful. Values of 10nF and 1kΩ may be used.

Many NPH series converters may be switched together simply by linking the primary control pins. The primary common pins must also be linked.

FREQUENCY CONTROL

If the primary side dc control voltage is pulled away from its open circuit voltage, the converter frequency will be changed, approximately in proportion to the voltage. With +8.5VDC voltage to SS pin, the typical switching frequency will be 300kHz. If this is raised to 15VDC, the switching frequency will typically be 510kHz. The frequency may thus be moved away from a sensitive value or into a safe area. Deviation of at least -10% to 30% is achievable, though the efficiency will decline with significant changes. Also note that if the frequency is lowered, the switching frequency component of output ripple will increase. Since the design uses no large electrolytic capacitors, any use of a lower frequency must allow for the effects of increased ripple. Additional external filtering may be required.

EMC FILTERING AND SPECTRA

FILTERING

The module includes a basic level of filtering, sufficient for many applications. Where lower noise levels are desired, filters can easily be added to achieve any required noise performance.

A DC/DC converter generates noise in two principle forms: that which is radiated from its body and that conducted on its external connections. There are three separate modes of conducted noise: input differential, output differential and input-output.


This last appears as common mode at the input and the output, and cannot therefore be removed by filtering at the input or output alone. The first level of filtering is to connect a capacitor between input and output returns, to reduce this form of noise. It typically contains high harmonics of the switching frequency, which tend to appear as spikes on surrounding circuits. The voltage rating of this capacitor must match the required isolation voltage. (Due to the great variety in isolation voltage and required noise performance, this capacitor has not been included within the converter.)

Input ripple is a voltage developed across the internal Input decoupling capacitor. It is therefore measured with a defined supply source impedance. Although simple series inductance will provide filtering, on its own it can degrade the stability. A shunt capacitor is therefore recommended across the converter input terminals, so that it is fed from a low impedance.

If no filtering is required, the inductance of long supply wiring could also cause a problem, requiring an input decoupling capacitor for stability. An electrolytic will perform well in these situations. The input-output filtering is performed by the common-mode choke on the primary. This could be placed on the output, but would then degrade the regulation and produce less benefit for a given size, cost, and power loss.

Radiated noise is present in magnetic and electrostatic forms. The latter is suppressed by the metal case, which is connected to the output return, typically a zero-volt point. Thanks to the small size of these units, neither form of noise will be radiated "efficiently", so will not normally cause a problem. Any question of this kind usually better repays attention to conducted signals.

EMC FILTER AND VALUES TO OBTAIN SPECTRA AS SHOWN

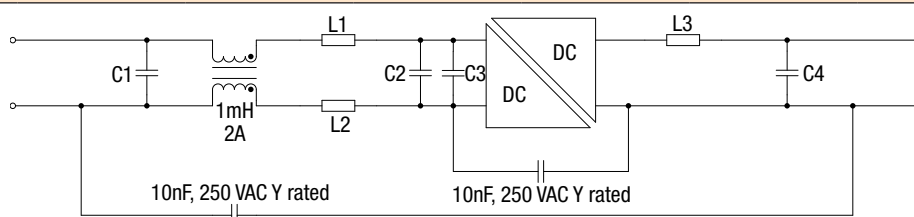

Component reference

	C1	C2	C3	C4	L1	L2	L3
NPH10S2403	10μF 100V	47μF 63V	2.2μF 63V	10μF 25V	C&D 18R333C 33μH 2A		C&D 18R472C 4.7μH 5.35A
NPH10S2405	10μF 100V	47μF 63V	2.2μF 63V	10μF 25V	C&D 18R333C 33μH 2A		C&D 18R103C 10μH 3.45A
NPH10S2412	10μF 100V	Not required	470nF 63V	10μF 25V	C&D 18R333C 33μH 2A		C&D 18R333C 33μH 2.00A
NPH10S2415	10μF 100V	10μF 63V	Not required	10μF 25V	C&D 18R473C 47μH 1.65A		C&D 18R333C 33μH 2.00A
NPH10S4803	10μF 100V	47μF 100V	220nF 100V	10μF 25V	C&D 18R104C 100μH 1.2A		C&D 18R472C 4.7μH 5.35A
NPH10S4805	10μF 100V	47μF 100V	220nF 100V	10μF 25V	C&D 18R104C 100μH 1.2A		C&D 18R103C 10μH 3.45A
NPH10S4812	10μF 100V	Not required	470nF 100V	10μF 25V	C&D 18R104C 100μH 1.2A		C&D 18R333C 33μH 2.00A
NPH10S4815	10μF 100V	Not required	470nF 100V	10μF 25V	C&D 18R104C 100μH 1.2A		C&D 18R333C 33μH 2.00A


C1, C2 & C4 : Electrolytic capacitors

C3 : Polyester or ceramic capacitor


EMC Spectra red limit line is EN 55022 curve B Quasi-peak average limit.

EMC FILTERING AND SPECTRA (continued)


NPH10S2403

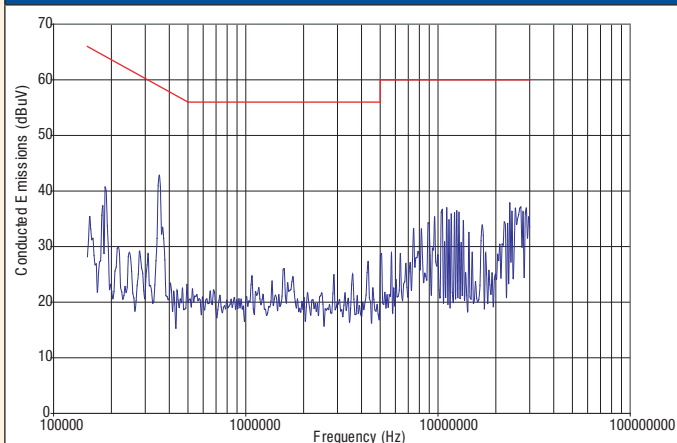


NPH10S2405

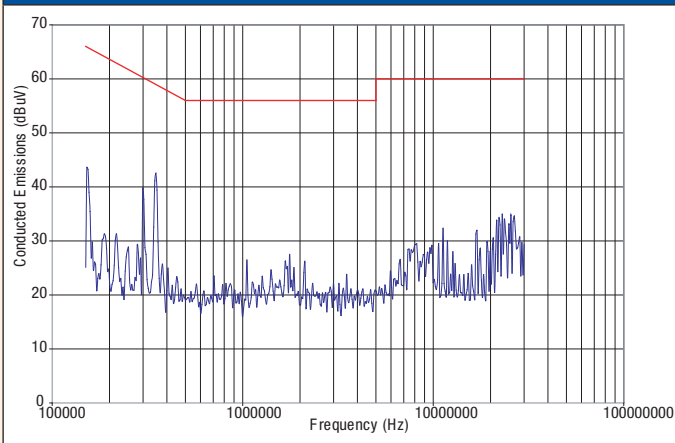


NPH10S2412

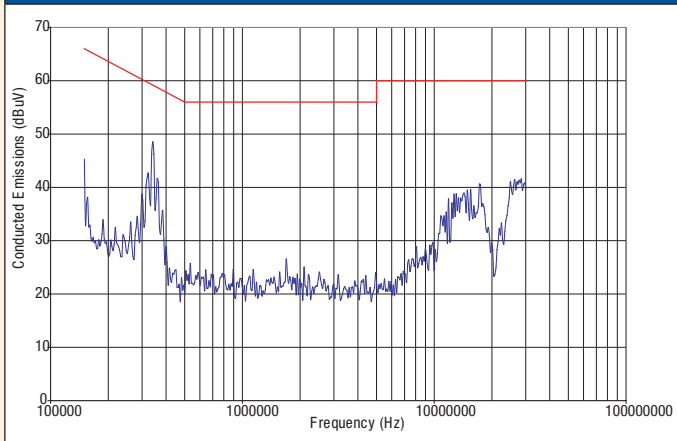


NPH10S2415

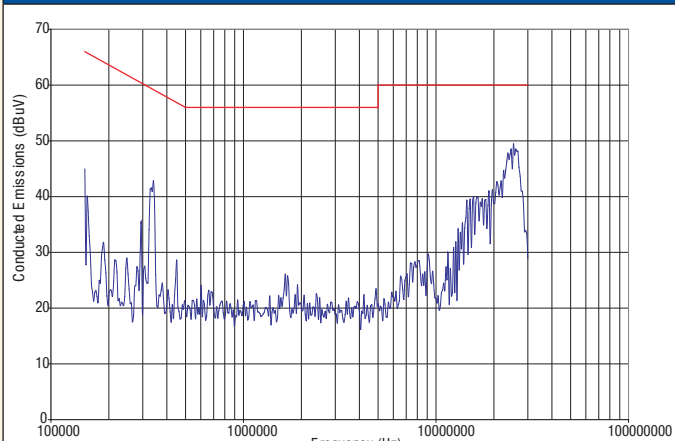



NPH10S4803

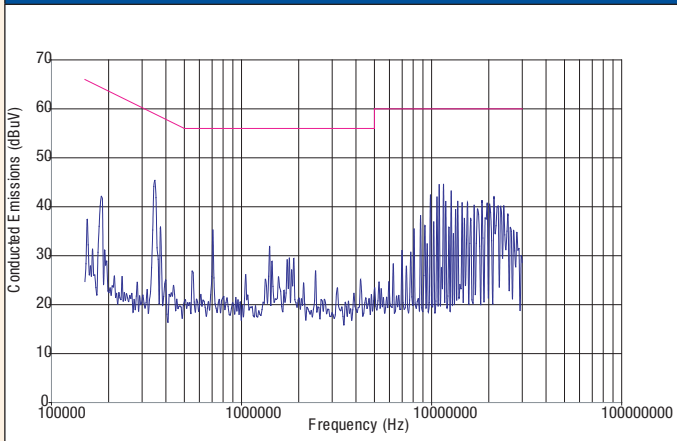


NPH10S4805

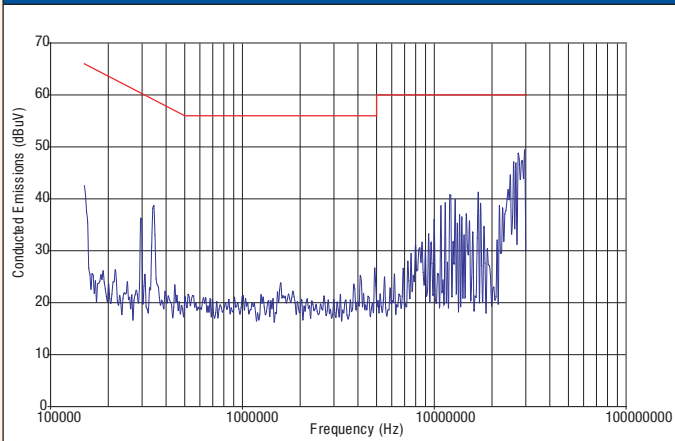

EMC FILTERING AND SPECTRA (continued)

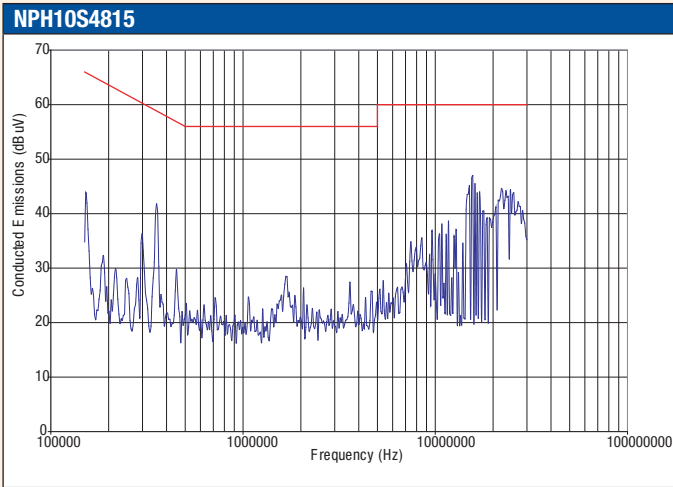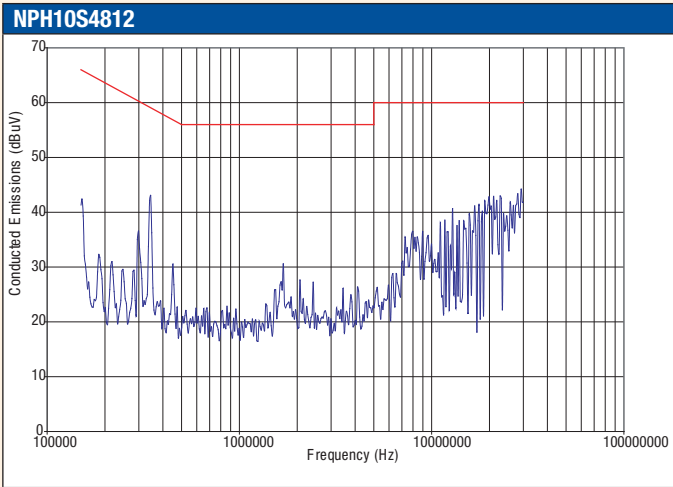

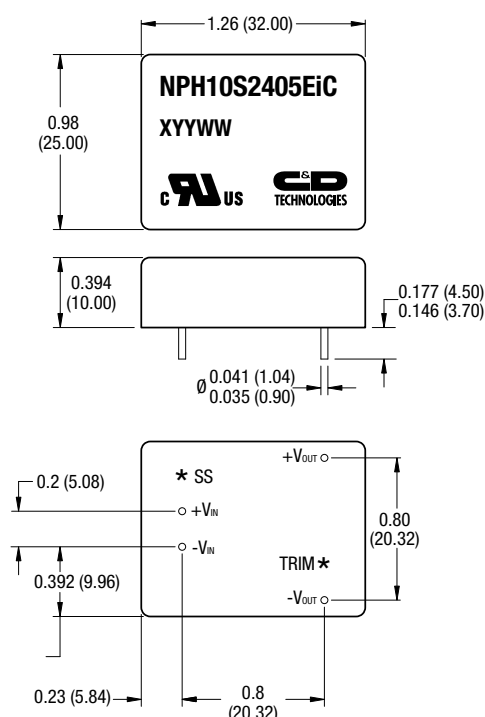PACKAGE SPECIFICATIONS
MECHANICAL DIMENSIONS


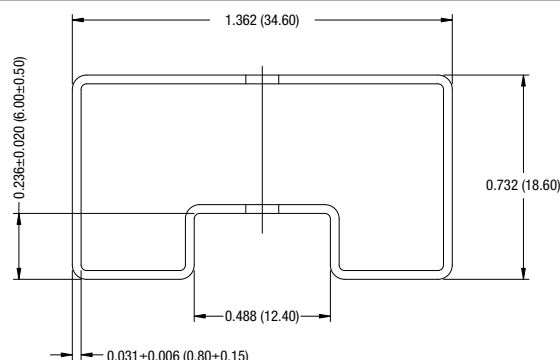
Weight: 22g

 All dimensions in inches ± 0.01 (mm ± 0.25 mm)

 All pins on a 0.10 (2.54) pitch and within ± 0.01 (2.54) of true position

* Optional control pins


 The copper case is connected to the output (-V_{OUT}) pin. Care is needed in the design of this circuit board on which the converter is mounted. Top side tracks must not contact the edge of the case on the underside of the unit.

TUBE OUTLINE DIMENSIONS

 All dimensions in inches ± 0.01 (mm ± 0.25 mm)

 Tube length: 20.866 (530) ± 2 (0.079)

Tube material: Antistatic coated clear PVC

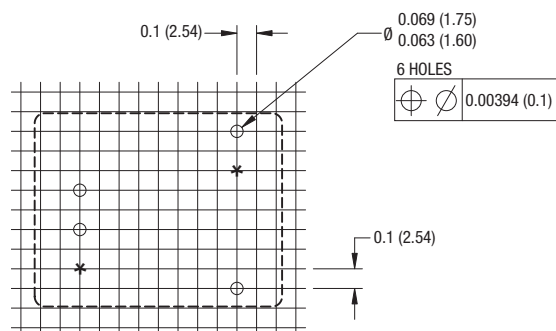Tube Quantity: 15

RECOMMENDED FOOTPRINT

 All dimensions in inches ± 0.01 (mm ± 0.25 mm)

* Optional control pins

RoHS COMPLIANCE INFORMATION


This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on this product series is Matte Tin over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

 For further information, please visit www.cd4power.com/rohs

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our website to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2006 KDC_NPH10SC.9

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited. Instructions for use are available from www.cd4power.com