


Rectangular Type

DC

3-wire

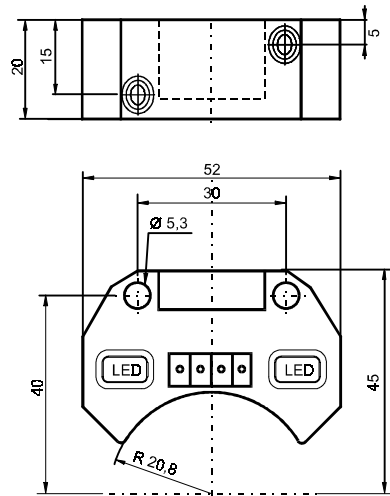

Operating dist. s_n , mounting	3 mm,			
	NBN3-F25-E8-K			
Assured operat. dist. s_a [mm]	0 ...2,43			
Reduction factor	r_{S137}	1,2		
	r_{V2A}	1		
	r_{AI}	0,5		
工作电压 U_B [V]	10 ...30			
工作电流 I_L [mA]	200			
Switching frequency [Hz]	500			
空载电流 [mA]	25			
Voltage drop [V]	3			
短路保护	脉冲			
Reverse polarity protection				
Output indicator	LED, 黄			
Valve status indicator	-			
工作温度 [°C]	-25 ...70			
EMC to	EN 60947-5-2			
In compliance with	EN60947-5-2			
Protection to IEC 60529	IP 67			
System connection (S)				
导线横截面	up to 2,5 mm ²			
Valve connection (V)	-			
Wire cross section Valve	-			

Standard symbol / connection:

