


矩形

DC

3-wire

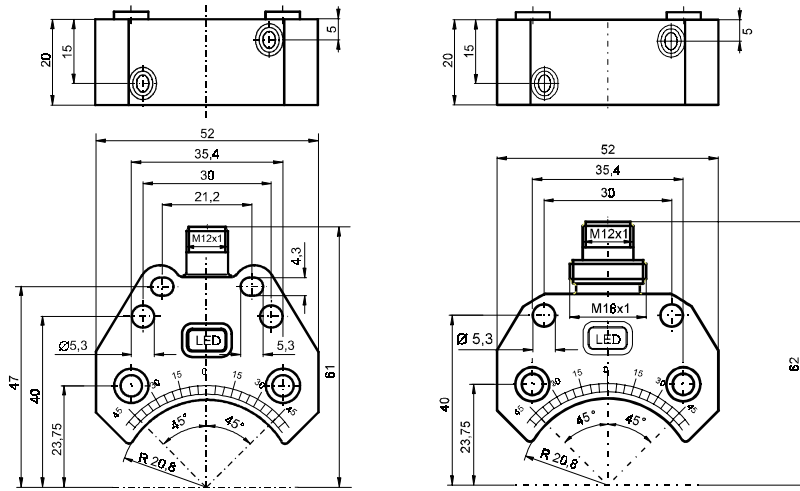

额定工作距离 s_n , 安装	3 mm,		3 mm,	
	NBN3-F25-E8-V1		NBN3-F25F-E8-V1	
可靠动作距离范围. s_a [mm]	0 ...2,43		2,3 ...	
衰减系数 r	r_{S137}	1,2	1,2	
	r_{V2A}	1	1	
	r_{AI}	0,5	0,5	
工作电压 U_B [V]	10 ...30		10 ...30	
工作电流 I_L [mA]	200		50	
开关频率 y [Hz]	500		100	
空载电流 [mA]	25		40	
电压降 [V]	3		3	
短路保护	脉冲		pulsing	
极性保护				
输出显示	LED, 黄		LED, yellow	
阀状态显示	-		-	
工作温度 [°C]	-25 ...70		-25 ...70	
EMC to	-		-	
In compliance with	EN60947-5-2		EN60947-5-2	
Protection to IEC 60529	IP 67		IP 67	
System connection (S)	V1-连接器		V1-connector	
Conductor cross section	-		-	
Valve connection (V)	-		-	
Wire cross section $_{Valve}$	-		-	

电气连接

E8

