
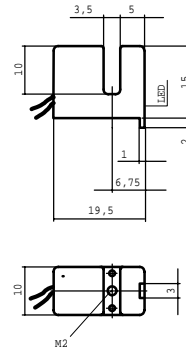


Slot Type

NAMUR

2-wire

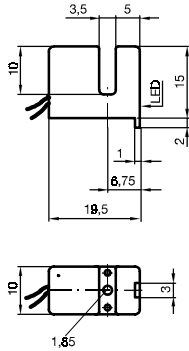

Slot width	3,5 mm	3,5 mm	
	SC3,5-N0	SC3,5-G-N0	
Entry depth [mm]	5 ...7	5 ...7	
Nominal voltage [V]	8	8	
Current consumption	-	-	
Sensing face covered [mA]	1	1	
Sensing face free [mA]	3	3	
Switching frequency [Hz]	3000	3000	
Self inductance [μH]	150	150	
Self capacitance [nF]	100	100	
Output indicator	LED, 黄	LED, yellow	
EMC to			
In compliance with	EN 50227	EN 50227	
Protection to IEC 60529	IP 67	IP 67	
工作温度 [°C]	-25 ...100	-25 ...100	
Connection		cabl	
导线横截面	0,14 mm ²	0,14 mm ²	
外壳材料	PBT	PBT	

Standard symbol / connection:

N / NO

Inductive Proximity Switches